


Actuation Options • FSL Chemical gas systems

Designed for use with

Clean Agent Chemical Gaseous Suppression Systems

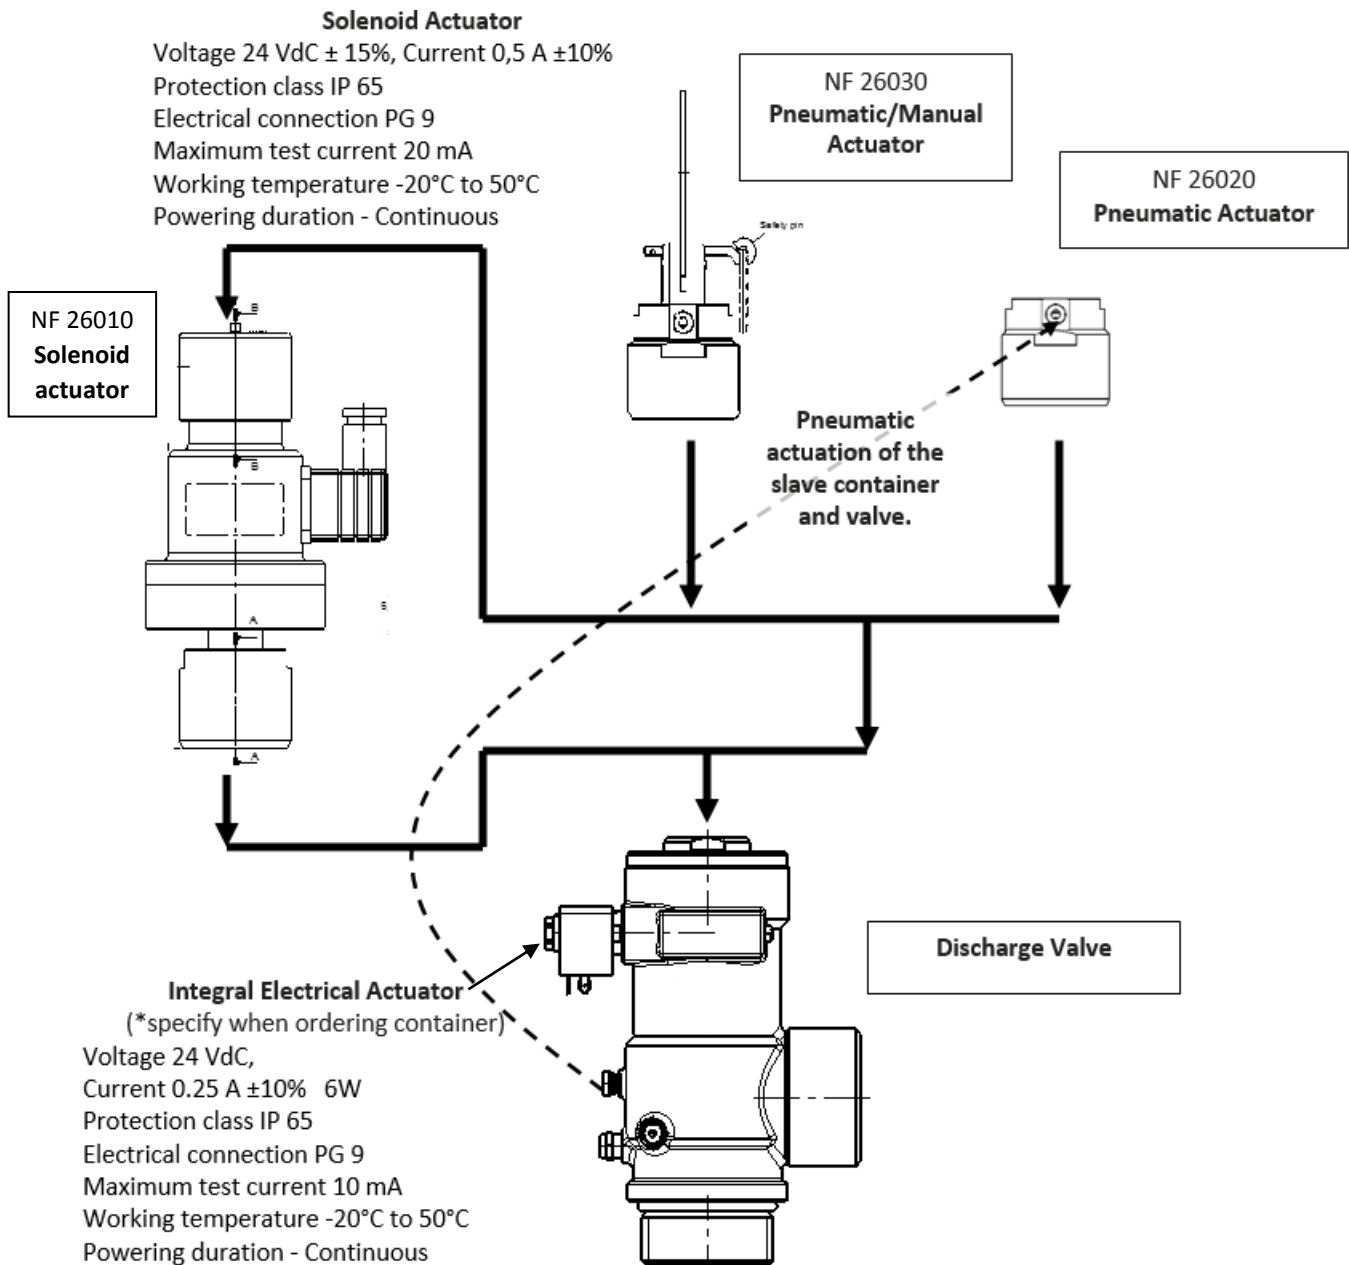

* Note: Integral Solenoid cannot be fitted after the container is filled.

Life of Actuators

The life of all actuators is indefinite.

Recommended maintenance:

- Visually check for corrosion and damage every 6 months
- Replace Integral Solenoid core every 10 years.