

# Technical Datasheet


Pneumatic / Manual Actuator  
NF26030



## Pneumatic / Manual Actuator • FSL Chemical gas systems

*designed for use with*

**Clean Agent Chemical Gaseous Suppression Systems**

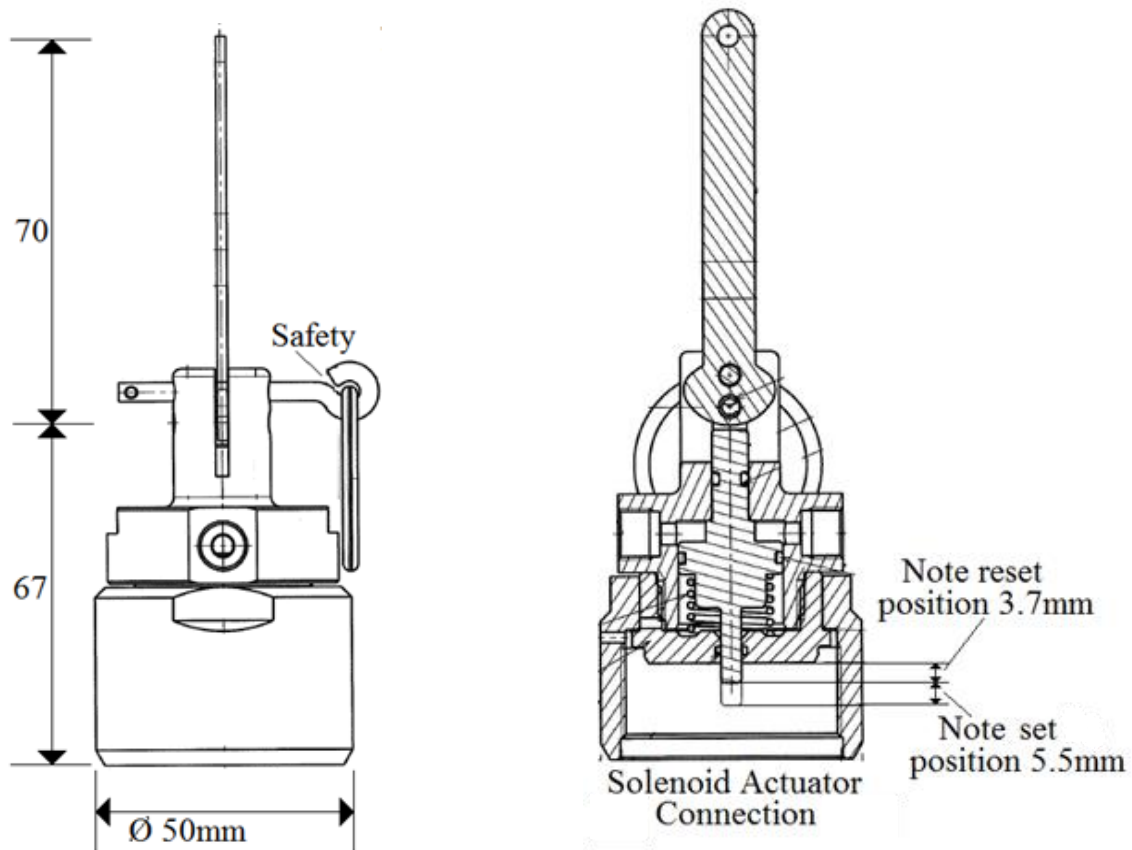

- Manual Actuation Force <150N
- Working Temperature -20°C to 50°C
- Minimum actuation pressure 16 Bar
- Connect the tripping mechanism to the valve using the M42 x 1.5 connecting thread with a torque of 50+0/-15 Nm. Screw fully down
- Connect the Pilot line using the G1/8" with PTFE tape
- To use only in combination with a solenoid actuator
- Refer to FSL CG<sup>2</sup> 227 Manual before assembling to system