



## Selector Valve Regulator • Inertech

*designed for use with*  
**FSL Inert Clean Agent Gaseous Suppression Systems**

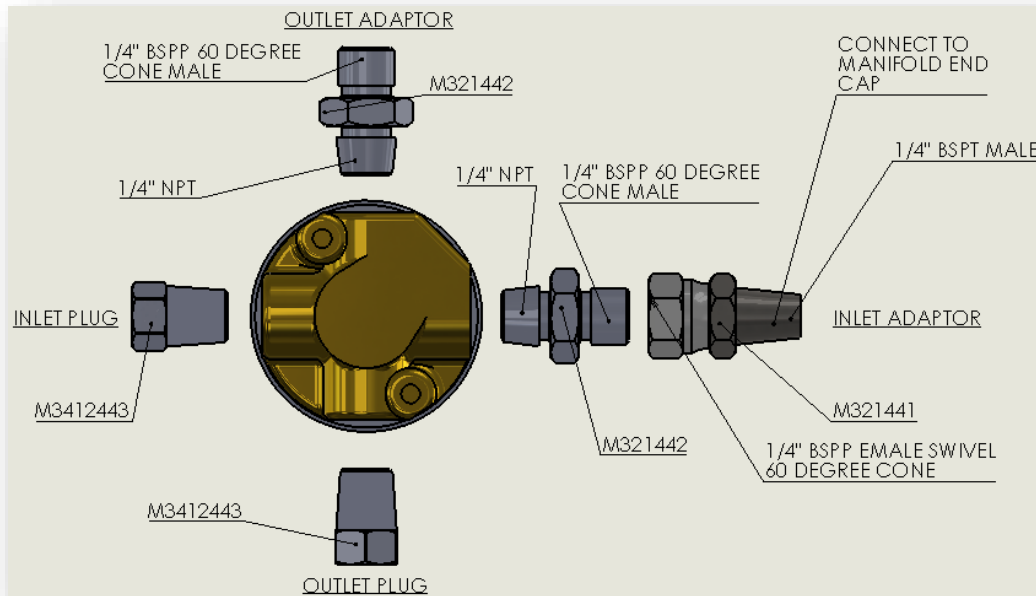

Connection Details

- Reduces the pressure in the manifold (potentially 60 bar) down to the 8 bar required to operate the selector valves
- Consists of 1 inlet connection and 3 outlet connections. The inlet connection must connect to the manifold. The outlets must be either connected to a NF370XXXX (various Length) connecting hose, a relief valve or be blocked off
- Regulator and adaptors supplied as a kit
- Ensure any unused outlets are plugged
- Material: Body = Brass, Bonnet = Zinc, Fittings = Steel zinc plated.

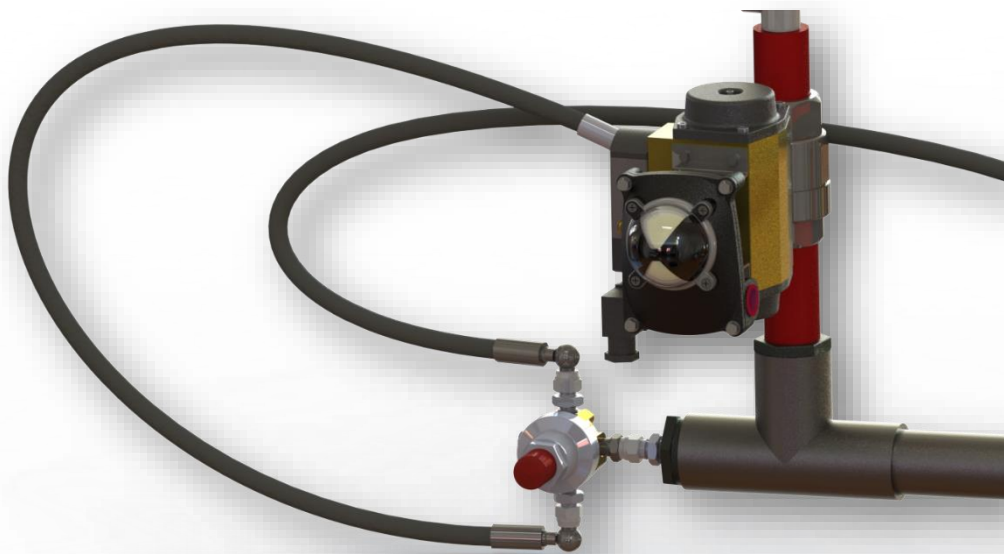

Selector Valve Regulator Typical Example